


IT'S TRUE. WE'RE VERY BIASED ABOUT THE HIGH PERFORMANCE BENEFITS OF THIS DYNAMIC DUO.

When it's high impact tire performance you're looking for in dozer/loader and dump truck operations, you've found the right team with our Y523 and Y524Z combination. These long life tires perform so well, we challenge you to find a better value in any radial tire comparisons.

More great technical innovation, only from Yokohama.


Y523: Dump trucks ride easy with the cut resistance rubber compounds and the high tensile steel breaker that provides impact and cut resistance at the tread crown area. Less heat generation gives extra long life to this highly durable tire.

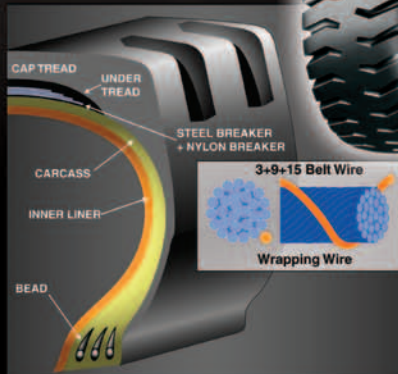

Y523

- For use on dump trucks
- For use in highly abrasive conditions
- Better tread cut and impact resistance
- High tensile steel breaker
- Extra deep tread

Y524Z: Provides superior traction for dozers and loaders, as well as sidewall cut resistance, with sidewall protector and buttress shoulder for super durable service. Its extra-deep tread depth lasts a long time, and its steel breakers guard against tread punctures for extra long life and reduced downtime.

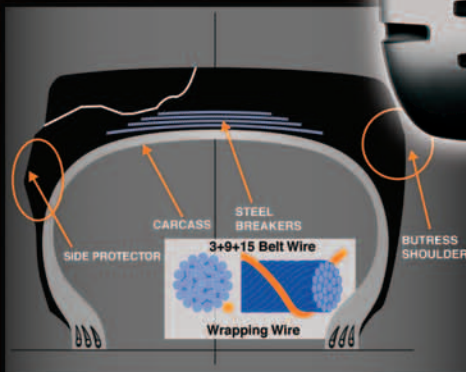

Y524Z

- For use on loaders and dozers
- Slick asymmetric tread pattern
- Superior tread and sidewall cut resistance
- Steel breakers guard against punctures
- Extra deep tread

For product information inside the U.S., contact:
Gary Nash
gary.nash@yokohamatire.com

For product information outside of the U.S., contact:
Henry Sakurabayashi
Henry.Sakura@mta.yrc.co.jp

www.yokohamatire.com

YOKOHAMA

TECHNOLOGY THAT DELIVERS™

Tire Size	Part Number	Compound	Groove Depth	Ply Rating and Type	Weight	Rim Size	Inflated Dimensions				Static Radius		Static Width	
							Overall Diameter		Overall Width		(mm)	(Inch)	(mm)	(Inch)
							(mm)	(Inch)	(mm)	(Inch)				

Y523 E-4

1800-33	02333	CPC/STL	71	36	T/L	1017	13.00 x 33-2.5	1850	72.8	518	20.4	869	34.0	542	21.0
1800-33	02335	CPC/STL	71	40	T/L	1124	13.00 x 33-2.5	1850	72.8	518	20.4	869	34.0	542	21.0
2100-35	02336	CPC/STL	80	36	T/L	1323	15.00 x 35-3.0	2045	80.5	590	23.2	951	37.0	623	25.0
2400-35	52328	CPC/STL	81	36	T/L	1659	17.00 x 35-3.5	2147	84.5	666	26.4	999	39.0	710	28.0
2400-35	52330	CPC/STL	81	42	T/L	1648	17.00 x 35-3.5	2147	84.5	666	26.4	999	39.0	710	28.0
2700-49	02327	CPC/STL	90	42	T/L	2461	19.50 x 49-4.0	2679	105.5	748	29.4	1245	49.0	791	31.0
2700-49	02328	CPC/STL	90	48	T/L	2549	19.50 x 49-4.0	2679	105.5	748	29.4	1245	49.0	791	31.0
3300-51	52329	CPC/STL	104	50	T/L	4780	24.00 x 51.5.0	3039	119.6	927	36.5	1404	55.0	985	39.0

Y524Z L-5

35/65-33	52428	CPC	121	24	T/L	2672	25.00 x 33	2075	81.7	899	35.4	953	37.5	932	36.7
35/65-33	52432	CPC	121	30	T/L	2719	28.00 x 33	2065	81.3	907	35.7	955	37.6	935	36.8
40/65-39	52437	CPC	133	36	T/L	3819	32.00 x 39	2400	94.5	1026	40.4	1107	43.6	1062	41.8
45/64-45	52430	CPC	145	38	T/L	5192	36.00 x 45	2741	107.9	1181	46.5	1260	49.6	1229	48.4
45/65-45	52439	CPC	145	46	T/L	5675	36.00 x 45	2741	107.9	1181	46.5	1260	49.6	1229	48.4
45/65-45	52438	CPC	145	50	T/L	5851	36.00 x 45	2741	107.9	1181	46.5	1260	49.6	1229	48.4
45/65-45	52440	CPC	145	58	T/L	6012	36.00 x 45	2741	107.9	1181	46.5	1260	49.6	1229	48.4

YOKOHAMA TIRE CORPORATION

Corporate Headquarters
P.O. Box 4550
Fullerton, CA 92834-4550
800.423.4544
714.870.3800

OTR CUSTOMER SERVICE

For Dealer Orders Call: 714.870.3888
Dealer Fax Orders: 714.870.3950

CONSUMER AFFAIRS

800.722.9888

M-391-0904

